



EJOT ANCHOR FIX®

Anchor dimensioning made easy



Easy download


Download EJOT ANCHOR FIX[®] at **www.ejot.com/software-anchorfix.** It is completely free to download and use, and all updates are also absolutely free.





Content

Innovations with EJOT ANCHOR FIX®	4-5
EJOT ANCHOR FIX® – easy and efficient	6
#1 New project	7
#2 Data entry	8
#3 Graphic input	9
#4 Results	10
#5 Printing	11

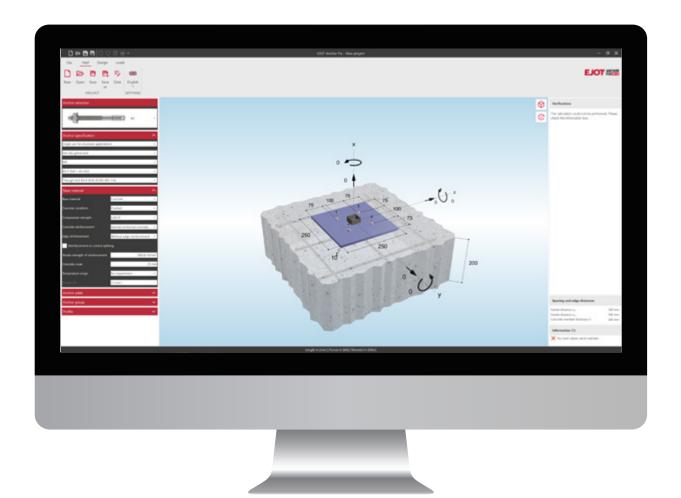

Innovations with EJOT ANCHOR FIX®

The EJOT ANCHOR FIX® software is constantly evolving to meet market and user requirements. The latest improvements include:

- > Ten different language versions
- > Choice between single and multiple fixing
- > Calculations in pre-stressed hollow core slabs
- > Calculations in masonry
- > Illustrations of the different fixing substrates help to select the right anchor
- > Problem-free input of results from pull-out tests
- > Display of compatible accessories and alternative anchors in addition to ETAs and product data sheets
- > Specification of the required quantity of injection mortar
- > Insertion of your own logo into the finished calculation
- > Mouseover graphics for detailed information
- > Numerous new products such as -
 - Facade anchors
 - Through bolts BA-V Plus, BA-F Plus and BA-E Plus
 - Chemical anchors

4

- LIEBIG® Safety bolts and LIEBIG® SUPERPLUS anchors
- New diameter 6 lengths of the JC2 concrete screw in all versions
- Concrete screw JC2 PLUS
- Entire CROSSFIX® system



				c e e d f	D New Coen Save Save as Recently used Project data	Print Fire Settings Compant Dene Without dane Selected date Custom lego	2001.2023	Market in the second se	oit BA-F-8/30 ph N _{am} ph N _{am} ph N _a	MB ND mm all mm all mm all mm domn block D ho vid D ho vid	phenesed 1219 1720 Nm 0 114 164 2010/4 45 Setting tool MS-10 44 2010/4 45 Setting tool MS-10 46 Setting tool MS-10 46 Setting tool MS-10 47 Setting tool MS-10 48 Setting tool MS-10 49 Setting tool MS-10 40 Setting	50m	
			*										

EJOT ANCHOR FIX[®] – Anchor dimensioning made easy

EJOT ANCHOR FIX® is a simple and efficient dimensioning software for heavy duty anchorages. It was developed to simplify the work of civil engineers, planners and technicians. As an EJOT ANCHOR FIX® user you can make complex calculations in no time, because although EJOT ANCHOR FIX® is a powerful software with dozens of functions, it is still easy to use.

With EJOT ANCHOR FIX[®] you can compare different options for attachment, calculate the safest option, choose the right products for each project and you ultimately get all results summarised in one document.

User-friendly

The user interface of the dimensioning software is very simple and logically structured. It is clearly divided into the following five sections: Project, data entry, graphical input, results, printing.

The software supports you in the processing of your project and provides reliable information for the respective areas of application. After completing the calculations, all information can be saved as a PDF file or printed out.

Reliable heavy duty fixing

EJOT ANCHOR FIX® is constantly being improved and updated to meet market and user requirements. New products and a supplemented range make calculations even easier.

Equipped with special functions

With EJOT ANCHOR FIX[®], you can make complex calculations in no time. In addition to the user-friendly interface, some very practical special features are available to you.

EJOT ANCHOR FIX® offers numerous recommendations and hints as well as additional technical information about each product. Product images with detailed technical information can be conveniently enlarged.

Constant online updating

EJOT ANCHOR FIX[®] is made even better by continuous expansion of the product range. In addition, EJOT ANCHOR FIX[®] now also includes the new lengths of the diameter 6 JC2 concrete screw in all versions as well as the JC2 PLUS concrete screw.



D New User name		Planned construction	Production engineer	Production engineer		
B Open Name	BANAGE	Description	+ Address			
Seve						
		Order number				
2 Save as		Police	Prov			
Recently		Deadline	* Enal			
		Address	* fa			
tt an						
Project data						
Dealer		Developer	Executing company			
Address		1 Abbens	- Addms			
Prove		Part I	Plane			
110		t-nal	1-mail			
M -		Par	Aus			

Capture the project data

#1 New project

First steps

All project-related information is recorded in this area, such as project name, order number, designer, client, brief information from the contractor and more. All entered information can be saved and used again and it will also be visible on report.



Display of the currently selected product



#2 Data entry


Clear representation

All information related to the calculation is listed in the form of a table – from the concrete compressive strength to the reinforcement and geometry to the type of fixing and occurring loads. In addition, the following options are available:

- > Choice between single and multiple fixing
- > Calculations in concrete or masonry
- > Calculations in pre-stressed hollow core slabs

Further accessories can be individually selected in the header according to size, type or material. An image of the selected product is always displayed together with the entered parameters.



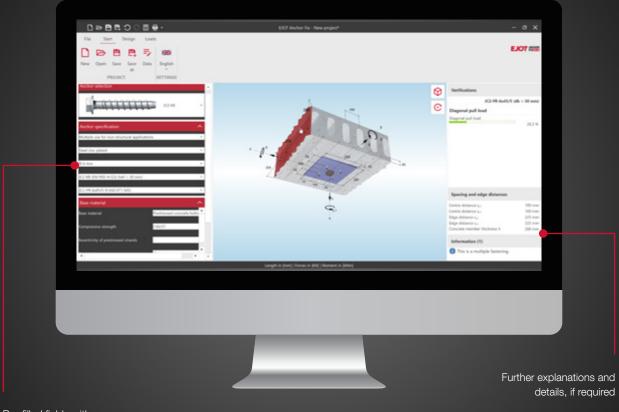

Pre-filled fields with suggestions make your work easier

#3 Graphic input

Simple recording of the loads

All relevant information can either be entered directly in the graphic or by clicking on the "Loads" tab in the header. The graphics can be zoomed, rotated or shifted so you can focus gradually on loads or on the substrate.



resulto*											
											07 555
S. T. Bandy S. T.											
Name	Mat., *	Dameter * 1	NEL." I	luf *	Tension load	Shear load	Interaction	Diagonal pul	HL.		
V Padat gray G Esperator Andre											_
- Family : BA										A 7-5/10 Out -	diami *
Through bolt \$4.5 12/08	Hot da p.	MID	12 mm	Tild man	I N N	-	and the second se	and the second			
Through bolk \$4.14-16/50	Statel pine	M76		85.0 mm	1.00	10 m	100	1.0			
Through bolt \$4.5-10/10	Steel pine	M10	10 mm	40.0 mm	MARTIN.	10.00	34.79 No.	\$4.75 W.C.			287.%
Through built 84-8-12/00	A4	M12		76.0 mm	11.002 Mail	24.2	Distant No.	41.02.0			
Through built \$4.4"- 16/50	Hot-dip-g	M16		45,3 mm	5.40 N	20.00 m	COMP IN	25.00 %		-	M415
Through Solt \$4-F-6/30	Hot-dip-p.	140	t even		5.95%	AT 15 YO	Statute and	COLUMN T			
Through built \$4.12-8/30	Steel pro	MD		45,0 mm	6.06 N	67.35 W.	and the second	ALC: NO. OF TAXABLE PARTY.			11.1 m
Through Init 84-6-10/32	A8	M10		40,0 mm	ALC: N	10.00	54.79 N.	54,7576			15.6 %
Through bulk \$8.4. 16/52		M16		\$5,2 mm	5.00 N.	200 C 10	200 P	20.00			
Through bull \$8.10-12/30	Steel proc	M12		70,0 inen	10.002	14.10 m	2012/01/16	41.02.04	_	and Area	
Through bolt \$8.4 6/10	84	MB		45,2 min	6.09 %	47.25.%	SHARE SHOW	Case of the local sectors of t			442.75
Through built \$4.7-10/02	1908-00p.g.	M10	10 mm	80,0 mm	H 52 %	22.25	54.79 %	54,75%		a (Anchor)	
											47.1%
> Family SA Plan											
										and shear load	
Frenity: LEBIOR Anchor All Chill										×1	27.8%
											10.4
> Family 18864 Anchor AS (Ad)										e ution? faiture)	
a check reaction worker of the											136,7 %
> Family - LEBICR Safety Solt 8										distances	
											100 mm
											100 mm
										leave h	200 mm
								Accept	Cancel	_	
										× Iw	106.1 %
				_							
			_		_	_					
		ľ									
										0	
										Summ	ary of results
										Summa	ary of results
										Summ	
										Summa	ary of results select
										Summ	
										Summ	
										Summa	select
	4										select A green
											select A green
			i								select

result view shows whether a


product is suitable

#4 Results

All information at a glance

- > List view with selected fixings
- > Information about suitable/unsuitable fixings
- > Specification of required mortar quantity
- > Alternatively, detailed information on each selected fastening incl. graphics
- > Listing of all relevant ETAs and product data sheets
- > Presentation of accessories and alternative anchors



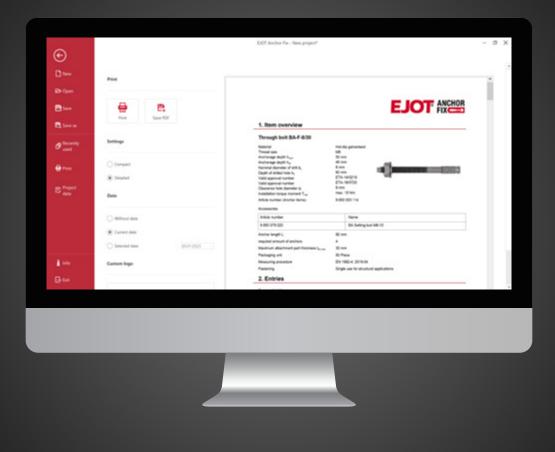

#5 Printing

More than just dimensioning software

EJOT ANCHOR FIX® not only takes care of your calculations, it also provides accurate and reliable documents that you can integrate into your own documentation. All calculations can be printed directly from EJOT ANCHOR FIX® or saved in a PDF file. The document contains all information and details.





EJOT SE & Co. KG Market Unit Construction

In der Stockwiese 35 57334 Bad Laasphe · Germany T +49 2752 908-0 F +49 2752 908-731 construction@ejot.com www.ejot.com/construction